

Installation and Applying Maintenance

Universal Controller 7.5.x

© 2024 by Stonebranch, Inc. All Rights Reserved.

Table of Contents

1	Overview	5
2	Installation Instructions.....	6
3	Applying Maintenance Instructions	5
4	Starting and Stopping Universal Controller	6
5	Installation and Applying Maintenance - Overview	7
5.1	Installation and Applying Maintenance	7
5.1.1	Installation.....	7
5.1.2	Applying Maintenance	7
5.2	Database Permissions.....	7
6	Universal Controller Installation.....	8
6.1	Overview	8
6.1.1	Applying Maintenance	8
6.2	Database Permissions.....	8
6.3	Pre-Installation Procedure.....	8
6.3.1	Overview	8
6.3.2	Determining Space Requirements	9
6.3.3	Installing Universal Controller Prerequisites	10
6.3.4	Downloading Universal Controller Software	22
6.4	Installing Universal Controller	23
6.4.1	Introduction	23
6.4.2	Installation Procedure	23
6.4.3	Unpack the Universal Controller Distribution File	23
6.4.4	Install the Controller	24
6.4.5	Deploy the Controller	28
6.4.6	Update the Universal Controller Start-up Properties (uc.properties).....	31
6.4.7	Verify the Installation.....	31
6.4.8	Apply the License Key.....	33
6.4.9	Enable LDAP Synchronization.....	34
6.4.10	Configure System Notifications.....	34

6.5	Adding a Cluster Node.....	36
6.5.1	Overview	36
6.5.2	Copy and Unpack the Universal Controller Distribution File.....	37
6.5.3	Install the Controller	37
6.5.4	Deploy the Controller	42
6.5.5	Verify the Installation.....	43
6.5.6	Adding an OMS Server.....	43
6.6	Applying Maintenance to Universal Controller.....	44
6.6.1	Overview	44
6.6.2	Universal Controller Maintenance.....	44
6.6.3	Verify the Installation.....	46
7	Starting and Stopping Universal Controller	49
7.1	Starting and Stopping the Controller on UNIX.....	49
7.2	Starting and Stopping the Controller on Windows.....	49

1 Overview

[Installation and Applying Maintenance - Overview](#)

2 Applying Maintenance Instructions

[Applying Maintenance to Universal Controller](#)

3 Installation Instructions

[Overview](#)

[Pre-Installation](#)

[Installing Universal Controller Prerequisites](#)

[Downloading Java Runtime Environment](#)

[Installing Apache Tomcat](#)

[Installing a Database](#)

[Installing Universal Controller](#)

[Adding a Cluster Node](#)

4 Starting and Stopping Universal Controller

[Starting and Stopping Universal Controller](#)

5 Installation and Applying Maintenance - Overview

5.1 Installation and Applying Maintenance

There are separate procedures for installing and applying maintenance for Universal Controller.

5.1.1 Installation

Installation refers to the installation of Universal Controller 7.5.x on a machine with any [supported platform](#) that does not already contain an installed Controller.

If you are installing Universal Controller for the first time, see [Universal Controller Installation](#) for instructions.

5.1.2 Applying Maintenance

For Universal Controller 7.5.x, applying maintenance refers to the increase from a currently installed 6.1.x or later [release](#) of the Controller to a 7.5.x release of the Controller (for example, increase Controller 6.1.3.1 to Controller 7.5.0.0).

If you are applying maintenance to your version of Universal Controller, see [Applying Maintenance to Universal Controller](#).

5.2 Database Permissions

In order to [install](#) Universal Controller, the [database](#) user configured for the Controller will require **DDL** (**D**ata **D**efinition **L**anguage) permission in the database during the install.

Once the install has been completed successfully, the configured database user requires only **DML** (**D**ata **M**anipulation **L**anguage) permissions for running the Controller.

6 Universal Controller Installation

6.1 Overview

Universal Controller is a Java web application running in a Tomcat web container.

For this reason, the Universal Controller software and the procedure for [installing Universal Controller on UNIX or Windows](#) is basically the same.

Note

This installation procedure does not include the installation of Java, Tomcat, or a database; however, they all are [prerequisites](#).

6.1.1 Applying Maintenance

For Universal Controller 7.5.x, applying maintenance refers to the increase from a currently installed 6.1.x or later [release](#) of the Controller to a 7.5.x release of the Controller (for example, increase Controller 6.2.0.1 to Controller 7.5.0.0).

See [Applying Maintenance to Universal Controller](#) for instructions.

6.2 Database Permissions

In order to install Universal Controller, the [database](#) user configured for the Controller will require **DDL** (Data Definition Language) permission in the database during the install.

Once the install has been completed successfully, the configured database user requires only **DML** (Data Manipulation Language) permissions for running the Controller.

6.3 Pre-Installation Procedure

6.3.1 Overview

Before you install [Universal Controller](#), you must perform the following pre-installation procedure:

Step 1	Determine the space requirements for Universal Controller software and the Universal Controller database.
Step 2	Install all required Universal Controller prerequisites .
Step 3	Download the platform-specific Universal Controller distribution file from the Stonebranch Customer Portal .

Note

You can install the Controller before, during, or after [installation of Universal Agent](#).

6.3.2 Determining Space Requirements

6.3.2.1 Overview

The following space requirements must be determined for the Controller and its database.

6.3.2.2 Controller Space Requirements

The Universal Controller war file is approximately 110MB compressed and 200MB uncompressed, using a total of approximately 310MB of space when fully deployed.

However, the space requirements for the Controller are driven largely by logging. Logging requirements are based on the log levels selected in the [Log Level](#) and [Platform Log Level](#) Universal Controller system properties.

A minimum 2GB of space is recommended for logging and other operations that require the Controller file system, such as bulk (and list) import/export.

The [Log File Retention Period in Days](#) Universal Controller system property lets you specify the number of days that a Controller log file (and an Agent log file) is retained before it is purged. The default is 5 days.

6.3.2.3 Database Space Requirements

Each type of database software (MySQL, Microsoft SQL Server, Oracle) takes up different amounts of space. However, the space required for saved Controller data is the same; that is, for example, 1,000 tasks consume no more space in MySQL than they do in Oracle.

6.3.2.3.1 Calculating Space Requirements

Following the initialization of the Controller database, the initial table space size will be approximately 60MB.

Based on calculations using data from all task types, each Controller task instance consumes approximately 10KB of database space. You should estimate space requirements for your data based on your expected number of task executions per day and the duration for retaining history and activity data before purging.

6.3.2.3.2 Output Retrieval

An Agent always caches output. Output is stored in the database only if you do one or more of the following:

- Select [Automatic Output Retrieval](#) for a task.
- Create [Email Notifications with output attachments](#) for task.
- [Retrieve output](#) for a task instance.

A retrieved output file of 1K (for example) will require 2KB to 2.5KB of space in the database.

6.3.3 Installing Universal Controller Prerequisites

Before [installing Universal Controller](#), on either Windows or UNIX (both Linux and AIX), you first must install the following prerequisites:

1. [Java Runtime Environment](#)
2. [Apache Tomcat](#)
3. [Database](#)

6.3.3.1 Downloading Java Runtime Environment

6.3.3.1.1 Introduction

You must download a Java Runtime Environment (JRE) appropriate for your platform:

Operating System	JRE	Supported Level
Windows, UNIX (Linux)	Oracle JRE	Levels 11 and 17
Windows, UNIX (Linux)	OpenJDK JRE	Levels 11 and 17
UNIX (AIX)	IBM JRE	Level 11

6.3.3.1.1.1 Oracle JRE

To download the Java Runtime Environment (JRE) for Windows and UNIX (Linux), access the Oracle site for Java JREs and download the appropriate package for your platform:

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>

6.3.3.1.1.2 OpenJDK JRE

To download Red Hat's implementation of OpenJDK, a free and open source implementation of the Java Platform, Standard Edition (Java SE), access Red Hat's download site and download the appropriate package:

<https://developers.redhat.com/products/openjdk/download/>

Note

If Universal Controller produces an exception while exporting a dashboard [widget](#) or generating a scheduled chart [report](#), a [required dependency](#) may not be installed.

6.3.3.1.1.3 IBM JRE

To download the IBM Java Runtime Environment (JRE) for UNIX (AIX), access the IBM site for Java JREs and download the appropriate package for your platform:

<https://www.ibm.com/support/pages/node/6208334>

6.3.3.2 Installing Apache Tomcat

Note

Apache Tomcat versions 8.5.x and 9.0.x are supported.

6.3.3.2.1 Install Apache Tomcat

Perform the following steps to install Apache Tomcat (download and installation procedure for Apache Tomcat may vary a bit for each platform):

Step 1	<p>Select an appropriate method of installation:</p> <p>Windows We recommend using the GUI installer to create the Apache Tomcat Service:</p> <ol style="list-style-type: none"> 1. Download the "32-bit/64-bit Windows Service Installer" from Tomcat 8.5.x or Tomcat 9.0.x. 2. Follow the instructions to install the package. <p>Windows or Linux/Unix Download a tar.gz or zip package that you unzip into a directory:</p> <ol style="list-style-type: none"> 1. Download an appropriate package from Tomcat 8.5.x or Tomcat 9.0.x. 2. Follow the instructions to unzip the appropriate package (tar.gz or zip) into a directory on your file system. <p>Linux/Unix: Redhat and Centos distributions Instead of downloading a tar.gz or zip package, you can use the yum installer.</p>
---------------	--

Step 2

In order to accommodate large workloads, Universal Controller requires that you configure the Java heap size options using the CATALINA_OPTS environment variable. The following table outlines the minimum recommended configuration.

<p>z/Linux</p>	<pre>CATALINA_OPTS="-Xms512m -Xmx2048m -Xjit:optLevel=noOpt"</pre>
<p>All Other Platforms</p>	<pre>CATALINA_OPTS="-Xms512m -Xmx2048m"</pre>

If you have installed Tomcat as a service on Windows, see [Windows Service](#), below; otherwise, see **All Platforms**:

All Platforms

A recommended way to set the CATALINA_OPTS environment variable is to use the optional `setenv` script.

The script is placed into either the CATALINA_BASE/bin or CATALINA_HOME/bin directory and is named `setenv.bat` (on Windows) or `setenv.sh` (on Linux/Unix). The file must be readable.

Note

The CATALINA_BASE environment variable specifies location of the root directory of the "active configuration" of Tomcat. It is optional. It defaults to be equal to CATALINA_HOME.

By default, the `setenv` script file is absent. If the script file is present in both CATALINA_BASE and CATALINA_HOME, the file in CATALINA_BASE is preferred.

For example, to configure the CATALINA_OPTS environment variable for Java 8, you can create the following script file:

On Windows, `%CATALINA_BASE%\bin\setenv.bat` :

```
set "CATALINA_OPTS=-Xms512m -Xmx2048m"
```

On Linux/Unix, `$CATALINA_BASE/bin/setenv.sh`:

```
CATALINA_OPTS="-Xms512m -Xmx2048m"
```


For additional Tomcat configuration details, including CATALINA_OPTS, see [RUNNING.txt](#).

Windows Service

If you installed Tomcat as a Windows service, you can set values using the `$CATALINA_HOME\bin\tomcatw.exe` GUI tool.

Enter the parameters as follows (for Tomcat 8.5.x or Tomcat 9.0.x):

- Initial memory pool = minimum heap size (Xms)
- Maximum memory pool = Maximum heap size (Xmx)

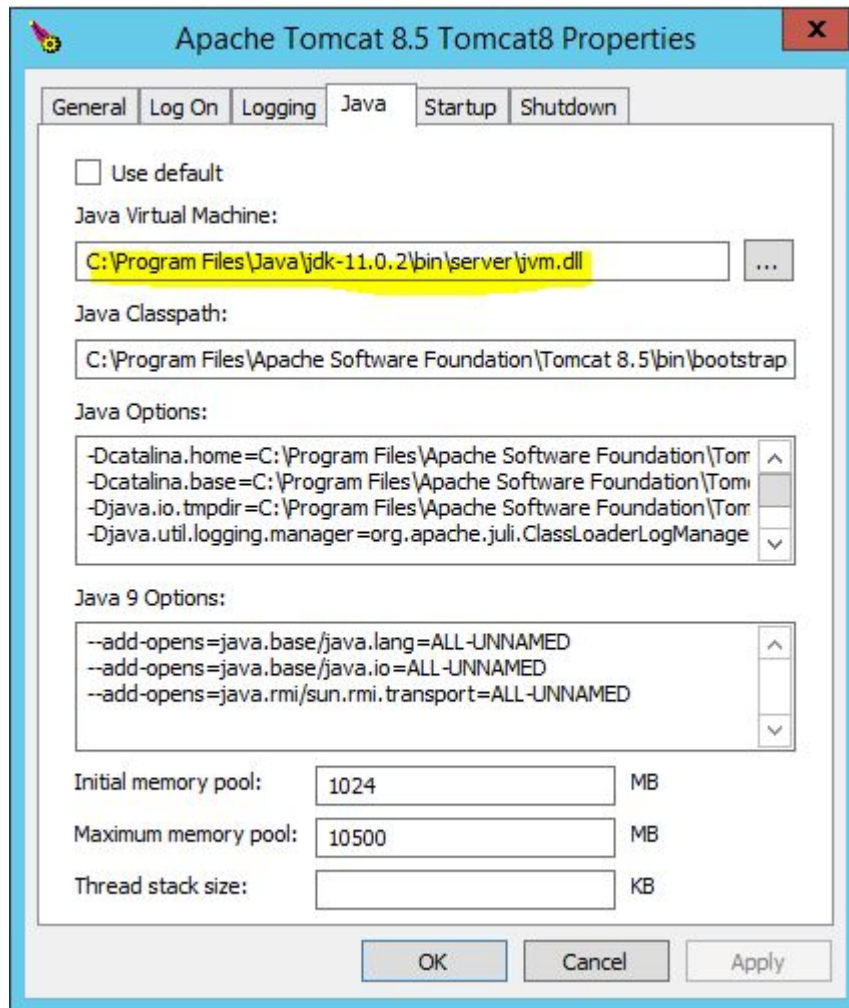


Note

Later, after you start Tomcat and log in to the Controller, you can validate these settings by running the **Memory Usage** operation, as follows:

1. From the **Administration** navigation pane, select **Configuration > Server Operations**.
2. Run the **Memory Usage** operation. The min and max numbers on the top line (Heap) should be similar to the above settings.

6.3.3.2.2 Start and Validate Apache Tomcat

Perform the following steps to start and validate Apache Tomcat:
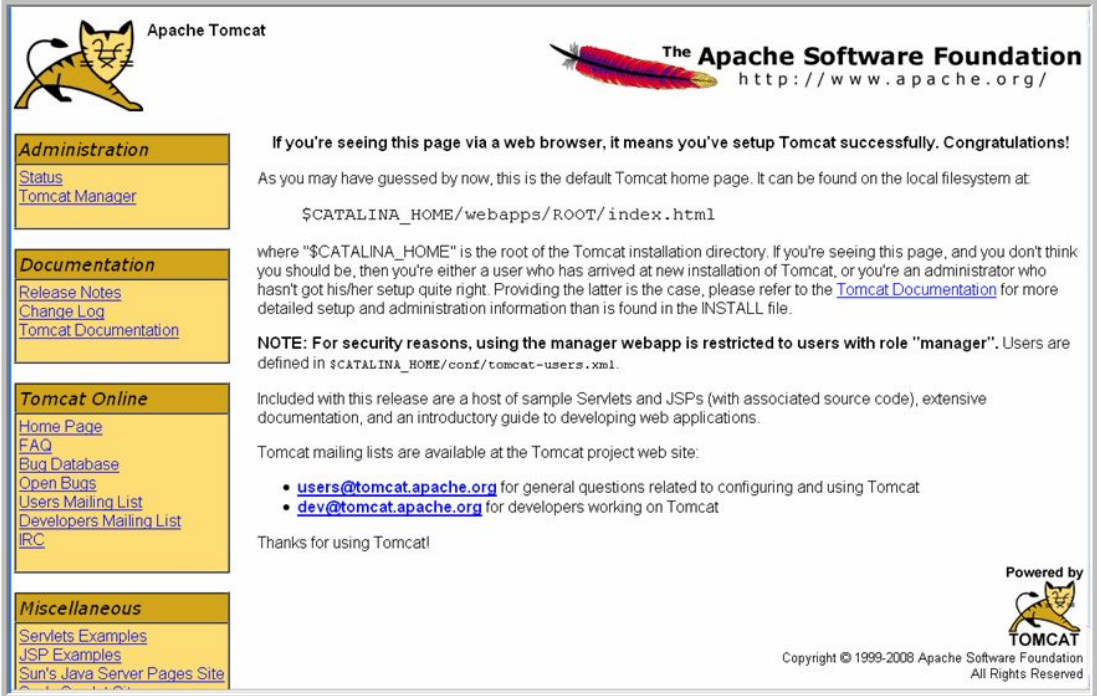
<p>Step 1</p>	<p>Tomcat is normally run as a system service or daemon. You can start Tomcat using the standard method for your operating system or by using a script, as follows:</p> <p>Windows Use Windows Services to start Tomcat or start Tomcat from the command line as follows: <code>net start <name of Tomcat service></code>.</p> <p>Linux Start the Tomcat daemon using the script placed in the <code>/etc/init.d</code> directory for Tomcat: <code>service <name of Tomcat service> start</code>.</p> <p>Windows or Linux Start the service using the <code>\$(CATALINA_HOME)/bin/startup.bat</code> or <code>\$(CATALINA_HOME)/bin/startup.sh</code> scripts.</p>
<p>Step 2</p>	<p>Open a browser and go to the following URL: http://localhost:8080.</p>
<p>Step 3</p>	<p>The following screen displays, verifying that you have successfully installed and started Tomcat:</p> 

6.3.3.2.3 Troubleshooting

6.3.3.2.3.1 Tomcat Post Limit: STATUS_MAX_POST_SIZE_EXCEEDED

Problem

The following error message displays:

```
The server did not receive the data that was sent to it. Please see the documentation for
isc.RPCResponse.STATUS_MAX_POST_SIZE_EXCEEDED
```

Resolution

Remove the post limit by specifying the following attribute on the **<Connector>** element in `conf/server.xml` :

```
maxPostSize="-1"
```

6.3.3.2.3.2 Special Characters Not Displaying Correctly

Problem

Some special characters not getting displayed correctly in your browser GUI.

Resolution

Tomcat on Windows requires you to define code page UTF-8 as the default code page for war files.

To do this, add the following to the Java options statement just as you did with the memory parameter:

```
-Dfile.encoding=UTF8
```

6.3.3.3 Installing a Database

6.3.3.3.1 Overview

Universal Controller can use a database space of an existing database or you can install a database specifically for the Controller.

We recommend an initial size of 100MB.

Note

In a [High Availability](#) environment, each cluster node connects to the same database.

6.3.3.3.1.1 Database Permissions

In order to [install](#) Universal Controller, the database user configured for the Controller will require **DDL** (Data Definition Language) permission in the database during the install.

Once the install has been completed successfully, the configured database user requires only **DML** (Data Manipulation Language) permissions for running the Controller.

6.3.3.3.2 Database Management Systems

The following database management systems are supported:

- [MySQL](#)
- [Microsoft SQL Server](#)
- [Oracle](#)

Databases that are compatible with and use the same JDBC drivers as the supported databases are also supported, for example AWS RDS (MySQL), MariaDB (MySQL), or Azure SQL Database (SQL Server). We recommend that customers periodically review the database documentation for Incompatibilities and Feature Differences as these may change over time.

6.3.3.3.2.1 MySQL

Note

MySQL versions 5.7.x and 8.0.x are supported.

Step 1	Download MySQL installation instructions .
Step 2	Download MySQL (Windows only). <ul style="list-style-type: none"> • For Windows, select Windows (x86, 32-bit), MSI Installer • For Unix and Linux, you can use a tar.gz download or select a systems package installer appropriate for your environment, such as Yum.
Step 3	Install MySQL as per the instructions.
Step 4	Make a note of the user ID and password to be used later when installing the Controller.
Step 5	The database will be created automatically when you select MySQL during the Controller installation process.

MySQL Options

The following enhancements can be made to your MySQL database.

Speeding Up MySQL Performance

For Windows installations, you can speed up MySQL performance by adding the following parameter to the appropriate `MySQL.ini` file:

```
innodb_flush_log_at_trx_commit=0
```

For more information about this parameter, see the MySQL documentation:

- http://dev.mysql.com/doc/refman/5.7/en/innodb-parameters.html#sysvar_innodb_flush_log_at_trx_commit
- http://dev.mysql.com/doc/refman/8.0/en/innodb-parameters.html#sysvar_innodb_flush_log_at_trx_commit

Setting the MySQL `max_allowed_packet` Configuration Variable

A communication packet is a single SQL statement sent to the MySQL server, a single row that is sent to the client, or a binary log event sent from a master replication server to a slave.

If you want the Controller to handle big packets, you must increase the MySQL `max_allowed_packet` configuration variable on the database server.

For detailed information about this variable, refer to:

- [MySQL 5.7.x reference manual](#)
- [MySQL 8.0.x reference manual](#)

MySQL SSL/TLS Configuration

If you use SSL/TLS for JDBC communication to your MySQL environment, some additional configuration is required (depending on your needs).

The MySQL configuration property `sslMode` can be used to control the SSL behavior for database connections.

By default, network connections are SSL encrypted; the `sslMode` property permits secure connections to be turned off or different levels of security to be selected.

The following `sslMode` values are allowed:

sslMode Value	Description
"DISABLED"	Establish unencrypted connections.
"PREFERRED"	Establish encrypted connections if the server enabled them, otherwise fall back to unencrypted connections. (Default value)
"REQUIRED"	Establish secure connections if the server enabled them, fail otherwise.
"VERIFY_CA"	Similar to REQUIRED; but additionally, verify the server TLS certificate against the configured Certificate Authority (CA) certificates.
"VERIFY_IDENTITY"	Similar to VERIFY_CA; but additionally, verify that the server certificate matches the host to which the connection is attempted.

To change the default behavior of SSL (PREFERRED), add the following to the `uc.properties` configuration file where `sslModeValue` is one of the values listed above (DISABLED, PREFERRED, REQUIRED, VERIFY_CA, VERIFY_IDENTITY):

```
uc.db.url.append.properties=&sslMode=sslModeValue
```

This property replaced the deprecated legacy properties `useSSL`, `requireSSL`, and `verifyServerCertificate`, which are still accepted but translated into a value for `sslMode`.

If "sslMode" is not explicitly set:

- { "useSSL=false" } is translated to "sslMode=DISABLED".
- { "useSSL=true", "requireSSL=false", "verifyServerCertificate=false" } is translated to "sslMode=PREFERRED".
- { "useSSL=true", "requireSSL=true", "verifyServerCertificate=false" } is translated to "sslMode=REQUIRED".
- { "useSSL=true" AND "verifyServerCertificate=true" } is translated to "sslMode=VERIFY_CA".
- There is no equivalent legacy settings for "sslMode=VERIFY_IDENTITY".

Note

For ALL server versions, the default setting of sslMode is "PREFERRED", and it is equivalent to the legacy settings of useSSL=true, requireSSL=false, and verifyServerCertificate=false, which are different from their default settings for Connector/J 8.0.12 and earlier in some situations.

Applications that continue to use the legacy properties and rely on their old default settings should be reviewed.

You may need to enable connections with TLSv1.2 and higher versions using the enabledTLSProtocols connection property. To specify the enabledTLSProtocols property, add the following to the uc.properties configuration file:

```
uc.db.url.append.properties=&enabledTLSProtocols=TLSv1.2
```

Prior to considering the enabledTLSProtocols connection property, you should verify the database connection using the latest Universal Controller maintenance release, as it may be using a more recent MySQL Connector/J, with functionality changed or added.

<https://stonebranchdocs.atlassian.net/wiki/display/SMLRI/Universal+Controller+Maintenance+Lists>

<https://dev.mysql.com/doc/connector-j/8.0/en/connector-j-usagenotes-known-issues-limitations.html>

6.3.3.3.2.2 Microsoft SQL Server

Note

Microsoft SQL Server versions 2014, 2016, 2017, and 2019 are supported.

Step 1

Download and install MS SQL Server as per the Microsoft documentation.

<p>Step 2</p>	<p>Create the Controller database. You can use any legal name, but we recommend the name uc.</p> <div style="border: 1px solid red; padding: 5px; margin-top: 10px;"> <p>Important</p> <p>You must use a case-insensitive collation.</p> </div>
<p>Step 3</p>	<p>Make a note of the userid and password to be used later when installing the Controller.</p>

Note

Universal Controller automatically appends the `sendStringParametersAsUnicode` parameter to the URL, setting it to false.

When set to false, the Unicode translation property specifies that prepared parameters for character data are sent as ASCII or Multi-byte Character Set (MBCS) instead of Unicode.

<jdbc:sqlserver://localhost:1433;databaseName=uc;sendStringParametersAsUnicode=false>

6.3.3.3.2.3 Oracle

Note

Oracle versions 19c and 21c are supported.

<p>Step 1</p>	<p>Download and install Oracle as per the Oracle documentation.</p>
<p>Step 2</p>	<p>Create the Controller database. You can use any legal name, but we recommend the name uc.</p>
<p>Step 3</p>	<p>Make a note of the userid and password to be used later when installing the Controller.</p>

If PDB (Pluggable Database) is being used for the Oracle Controller database, the JDBC URL should be used in EZCONNECT format and point to the PDB service, not the database SID.

For example:

```
jdbc:oracle:thin:@//dbhost:1521/pdbuc.userdomain
```

Oracle Options

The following enhancements can be made to your Oracle database.

Setting `open_cursors` Value for Large Imports

To facilitate large imports on Oracle, specify the maximum number of cursors that can be open by setting the `open_cursors` value to 1000.

(The cursors are used only during the import; they then are closed.)

Checking the Current Value of `open_cursors`

To check the current value for maximum open cursors, issue the following **sql*plus** utility command:

```
show parameter open_cursors
```

A listing similar to the following will display:

```
SQL> show parameter open_cursors;
```

NAME	TYPE	VALUE
open_cursors	integer	1000

Setting a New Value for `open_cursors`

You can temporarily set the `open_cursors` value with the following SQL:

```
alter system set open_cursors=1000
```

To make a permanent change, you must set the `open_cursors` value in the initialization parameters file.

Note

If you do not set `open_cursors` to 1000, you could receive the following error message during large imports:

```
ORA-01000: maximum open cursors exceeded
```

Character Sets

Universal Controller does not stipulate a requirement for the Oracle database character set; for multilingual support, you can use the default Unicode character set of AL32UTF8.

<https://docs.oracle.com/database/121/NLSPG/ch6unicode.htm#NLSPG317>

Block Size

A block size of 8K is optimal for most systems, including Universal Controller.

https://docs.oracle.com/cd/B19306_01/server.102/b14211/iodesign.htm#i19636

6.3.4 Downloading Universal Controller Software

6.3.4.1 Overview

This page tells you how to download the current Universal Controller 7.5.x software from the Stonebranch [Customer Portal](#).

6.3.4.1.1 Versioning

Universal Automation Center software (Universal Controller and Universal Agent) packages are labeled with four numeric identifiers: Version.Release.Modification.Maintenance.

For example, for Universal Controller 7.5.0.0:

- 7 = Version 7
- 5 = Release 5
- 0 = Modification Level 0
- 0 = Maintenance Level 0

6.3.4.2 Downloading Current Products Software

To download the Universal Controller 7.5.x software:

Step 1	Log in to the Stonebranch Customer Portal . If you do not have a login, you can request one at support@stonebranch.com .
Step 2	Click the Software Downloads link.
Step 3	Click the Universal Controller link.
Step 4	Click the Universal Controller package link appropriate for your platform.
Step 5	Click Save File and browse to your save location. You can then use the software to install or apply maintenance to the Controller .

6.4 Installing Universal Controller

6.4.1 Introduction

This page tells you how to install Universal Controller.

The procedure is the same, unless otherwise noted, for both Windows and UNIX (Linux or AIX).

It assumes you already have performed all required [Pre-Installation Procedure](#):

- Determined [Determining Space Requirements](#)
- Installed all [Installing Universal Controller Prerequisites](#).
- Downloaded a Universal Controller [Downloading Universal Controller Software](#).

6.4.2 Installation Procedure

To install Universal Controller:

1	Unpack the Downloaded Distribution File
2	Install the Controller
3	Deploy the Controller
4	Update the Universal Controller Start-up Properties
5	Verify the Installation
6	Apply the License Key
7	Enable LDAP Synchronization
8	Configure System Notifications

6.4.3 Unpack the Universal Controller Distribution File

To unpack the Universal Controller distribution file, use the following method appropriate for your platform:

Linux/Unix	<pre>tar -xvf universal-controller-N.N.N.N.tar</pre>
Windows	Use an appropriate archiving / unzipping product.

6.4.4 Install the Controller

To install the Controller, issue the following command that is appropriate for your platform:

<p>Linux</p>	<pre>> sh install-controller.sh</pre>
<p>Windows</p>	<pre>> install-controller.bat</pre>

The installation process writes the war file (`universal-controller-N.N.N.N-build.N.war`) to the Tomcat installation directory and renames it `uc.war`.

You must include command line switches that specify information the Controller needs to access the Tomcat installation directory, the war file, and the database. You can include additional command line switches, but they are not required.

If a required command line switch is missing from the command line, an error message will identify it during the installation process.

The Controller installation process writes the values for some command line switches to the [Universal Controller Start-up Properties \(opswise.properties\)](#), `uc.properties` (see the table, below). For any of those command line switches that are not required and, in fact, are not included on the command line, the Controller installation process writes their default value to `uc.properties`.

6.4.4.1 Command Line Switches

The following table describes the command line switches for the Controller installation process and identifies which are required.

For command line switches that have their value written to the [Universal Controller Start-up Properties \(uc.properties\)](#), `uc.properties`, the table also identifies the property in that file to which the value is written.

Note

All command line switches are case-sensitive.

Command Line Switch	Description	Default	Required	Control Property
<code>--agentonly</code>	For an Agent-Only deployment If <code>--agentonly</code> is true, Universal Controller Start-up Properties (uc.properties) is deployed with an Agent-Only demonstration license.	false	No	
<code>--controller-file</code>	Full path of the Universal Controller war file (<code>universal-controller-N.N.N.N-build.N.war</code>) from the downloaded Universal Controller package.	none	Yes	
<code>--dbname</code>	Universal Controller database name. The property <code>uc.db.name</code> should be set to the name of the database being connected to. It can be seen in the System Details widget under Database information as well as in the <code>uc.log</code> . <ul style="list-style-type: none"> • Oracle <ul style="list-style-type: none"> • For Oracle, the <code>uc.db.name</code> property is for informational purposes only. • SQL Server <ul style="list-style-type: none"> • If the <code>uc.db.url</code> property contains the attribute "DatabaseName" then the <code>uc.db.name</code> property is for informational purposes only, similar to Oracle. • If however, the <code>uc.db.url</code> does not contain the database name, then the <code>uc.db.name</code> will be used to connect to the database by issuing the SQL "USE dbname", where dbname is the value of the <code>uc.db.name</code> property. • MySQL <ul style="list-style-type: none"> • MySQL should not contain the database name in the <code>uc.db.url</code> property. • MySQL will use the <code>uc.db.name</code> property to connect to the database specified by also issuing the SQL "USE dbname" statement where dbname is the value of the <code>uc.db.name</code> property. 	uc	No	uc.db.name
<code>--dbpass</code>	Database user's password.	none	Yes	uc.db.password

Command Line Switch	Description	Default	Required	Controller Property								
<div style="border: 1px solid black; padding: 5px; width: fit-content;">--dburl</div>	<p>JDBC connect URL.</p> <p>Format: <code>jdbc:[database type]://localhost</code></p> <p>Examples (for MS SQLServer and Oracle, <code>uc</code> is the database name):</p> <table border="1" data-bbox="328 629 1179 1108"> <tr> <td data-bbox="328 629 692 723">MySQL</td> <td data-bbox="692 629 1179 723"><code>jdbc:mysql://localhost:3306/</code></td> </tr> <tr> <td data-bbox="328 723 692 831">MS SQL Server</td> <td data-bbox="692 723 1179 831"><code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code></td> </tr> <tr> <td data-bbox="328 831 692 940">MS SQL Server JTDS</td> <td data-bbox="692 831 1179 940"><code>jdbc:jtds:sqlserver://localhost:1433/uc</code></td> </tr> <tr> <td data-bbox="328 940 692 1108">Oracle</td> <td data-bbox="692 940 1179 1108"> <code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code> </td> </tr> </table> <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>Enclose the URL in quotation marks to guard against any special characters (for example: <code>></code> <code><</code> <code>&</code>) which are treated by the shell uniquely.</p> <ul style="list-style-type: none"> • Unix Enclose the URL in <i>single</i> quotation marks; for example: <code>'jdbc:sqlserver://dbserver.local;instanceName=IN01;DatabaseName=uc'</code> • Windows Enclose the URL in <i>double</i> quotation marks; for example: <code>"jdbc:sqlserver://dbserver.local;instanceName=IN01;DatabaseName=uc"</code> </div> <p>Refer to the jdbc documentation from your database supplier for specific jdbc driver URL parameters or options that might be needed for your environment. You may want to consult with your local DBA to discuss these parameters and options.</p> <p>Refer to Installing a Database in this documentation for more information about suggested connection parameters, database configuration, and setup.</p>	MySQL	<code>jdbc:mysql://localhost:3306/</code>	MS SQL Server	<code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code>	MS SQL Server JTDS	<code>jdbc:jtds:sqlserver://localhost:1433/uc</code>	Oracle	<code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code>	<p><code>jdbc:mysql://localhost:3306/</code></p>	<p>No</p>	<p><code>uc.db.url</code></p>
MySQL	<code>jdbc:mysql://localhost:3306/</code>											
MS SQL Server	<code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code>											
MS SQL Server JTDS	<code>jdbc:jtds:sqlserver://localhost:1433/uc</code>											
Oracle	<code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code>											
<div style="border: 1px solid black; padding: 5px; width: fit-content;">--dbuser</div>	<p>Database user name.</p>	<p>none</p>	<p>Yes</p>	<p><code>uc.db.user</code></p>								

Command Line Switch	Description	Default	Required	Controller Property
<div style="border: 1px solid gray; padding: 5px; width: fit-content;">--port</div>	<p>Used by the Universal Controller to generate a unique Cluster Node Node Id in the format of hostname:port-dbname.</p> <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>This is meant to represent the value of the Tomcat HTTP/1.1 Connector port configured in the server.xml.</p> <p>It is used solely for Node Id generation and does not impact the Tomcat HTTP/1.1 Connector configuration.</p> </div>	8080	No	uc.servlet.port
<div style="border: 1px solid gray; padding: 5px; width: fit-content;">--rdbms</div>	<p>Database type.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> • mysql • sqlserver • sqlserver-jtds • oracle <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>* --rdbms <i>is</i> required if --dburl is used in the command.</p> </div> <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>Customers have reported difficulty establishing secure SQL connections using the jTDS open source JDBC driver for Microsoft SQL Server (--rdbms sqlserver-jtds) when SSL/TLS is enabled on the server.</p> <p>We have received feedback that the issue can be resolved by installing a patched version of the jTDS driver from bug report https://sourceforge.net/p/jtds/bugs/725/.</p> <p>Stonebranch only bundles the official jTDS release, currently 1.3.1, with the Universal Controller.</p> <p>We do not include unofficial patches, and if you decide to use them, you do so at your own risk.</p> </div>	mysql	No *	uc.db.rdbms
<div style="border: 1px solid gray; padding: 5px; width: fit-content;">--tomcat-dir</div>	<p>Path to the Tomcat installation directory (contains the directories: /bin , /conf , /logs , webapps).</p> <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>Enclose the path in quotes to guard against spaces or any special characters (for example: ; > < &), which are treated by the shell uniquely.</p> </div>	none	Yes	

6.4.4.2 Examples

Shown below are sample commands for installing the Controller on Linux and Windows platforms, using defaults for the database:

<p>Linux</p>	<pre>sh install-controller.sh --tomcat-dir ~/tomcat --controller-file ./universal-controller-N.N.N.N-build.N.war --dbuser root --dbpass userpass</pre>
<p>Windows</p>	<pre>install-controller.bat --tomcat-dir "c:\Program Files\Apache Software Foundation\Tomcat 9.0" --controller-file universal-controller-N.N.N.N-build.N.war --dbuser root --dbpass userpass</pre> <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>In the Tomcat directory (--tomcat-dir), when quoting the directory is necessary due to spaces, do not use a single backslash before the ending quotation mark; use either a double backslash or no backslash to avoid the command shell from treating \" as an escape character.</p> </div>

6.4.5 Deploy the Controller

In this procedure, you will start Tomcat, which starts the Controller and builds your database tables. This process takes several minutes. When it is complete, the Controller is started and ready to use.

If Tomcat already was running when you installed the Controller, you do not need to stop and restart it; this process will occur automatically after you start the installation.

Step 1

Start Tomcat as follows:

Linux

Start the Tomcat daemon using the script placed in the `/etc/init.d` directory for Tomcat.

```
service [name of Tomcat service] start
```

Windows

We recommend you use Windows Services to start Tomcat. Or, you can start Tomcat from the command line as follows:

```
net start [name of Tomcat service]
```

Linux or Windows

You can start the service using the `$CATALINA_HOME/bin/startup.bat` or `$CATALINA_HOME/bin/startup.sh` scripts.

<p>Step 2</p>	<p>During this initial startup, the Controller builds the database tables, a process that takes several minutes. You can view details in the Tomcat window or monitor the Controller log, as described below:</p> <p>Linux/Unix Users can tail the <code>uc.log</code> to monitor the deployment process, as follows:</p> <pre>tail -f \$TOMCAT_DIR/uc_logs/uc.log</pre> <p>Windows Users can use a third-party tailing utility or open the log file using Notepad or other editor and scroll to the bottom to view the latest activity.</p> <pre>\$TOMCAT_DIR\uc_logs\uc.log</pre> <p>Do not continue until you see output in the log similar to the following:</p> <pre>2014-09-15-11:16:17:775 -0400 INFO [Ops.Cluster.Monitor.0] Cluster Monitor / ClusterWatchDog started (16951472) 2014-09-15-11:16:17:778 -0400 INFO [Ops.Cluster.Monitor.0] No active node found. sb-server:8080-ops6100 becoming Active node. 2014-09-15-11:16:17:778 -0400 INFO [Ops.Cluster.Monitor.0] Loading time zones 2014-09-15-11:16:17:810 -0400 INFO [Ops.Cluster.Monitor.0] Setting System time zone to "America/New_York" 2014-09-15-11:16:17:810 -0400 INFO [Ops.Cluster.Monitor.0] Initialize PubSubController 2014-09-15-11:16:17:813 -0400 INFO [Ops.Cluster.Monitor.0] PubSubController Active Start Load: 0 Subscriptions 2014-09-15-11:16:17:813 -0400 INFO [Ops.Cluster.Monitor.0] Server is now Running in Active mode. Previous mode was Passive 2014-09-15-11:16:17:813 -0400 INFO [Ops.Cluster.Monitor.0] Setting server to ACTIVE. 2014-09-15-11:16:17:814 -0400 INFO [Ops.Cluster.Monitor.0] Releasing lock and ending transaction 2014-09-15-11:16:18:147 -0400 INFO [Ops.Cluster.Monitor.0] 617 database statements took 0 Seconds 2014-09-15-11:16:18:149 -0400 INFO [Ops.Cluster.Monitor.0] Lock released and transaction ended 2014-09-15-11:16:18:149 -0400 INFO [Ops.Cluster.Monitor.0] Creating OmsServerWatchDog 2014-09-15-11:16:18:150 -0400 INFO [Ops.Cluster.Monitor.0] Creating AgentWatchDog 2014-09-15-11:16:18:150 -0400 INFO [Ops.Cluster.Monitor.0] Creating ApplicationWatchDog</pre>
<p>Step 3</p>	<p>When you see the following, the Controller is ready:</p> <ul style="list-style-type: none"> • INFO [Ops.Cluster.Monitor.0] Server is now Running in Active mode. Previous mode was Passive • INFO [Ops.Cluster.Monitor.0] Setting server to ACTIVE.

You now have completed the install process and the Controller is running.

6.4.6 Update the Universal Controller Start-up Properties (uc.properties)

6.4.6.1 For AIX and z/Linux only

Follow this procedure to change two default values in the [Universal Controller Start-up Properties \(uc.properties\)](#), `uc.properties`, which is read by the Controller.

(The `uc.properties` file resides in `<tomcat directory>/conf`).

<p>Step 1</p>	<p>Change the following two properties from their default value to the IBM AIX value:</p> <ul style="list-style-type: none"> • <code>uc.trustmanager.algorithm=</code> (Java trust manager algorithm) <ul style="list-style-type: none"> • Default value = SunX509 • IBM AIX = IbmX509 • <code>uc.trustmanager.provider=</code> (Java trust manager provider) <ul style="list-style-type: none"> • Default value = SunJSSE • IBM AIX value = IBMJSSE2
<p>Step 2</p>	<p>Restart Tomcat.</p>

6.4.7 Verify the Installation

To make sure the Controller is installed, running, and communication with Universal Agent and Universal Message Service (OMS):

<p>Step 1</p>	<p>Starting and Stopping Universal Controller.</p>
<p>Step 2</p>	<p>From your browser, access the Universal Controller user interface.</p> <div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;"> <p><code>http://localhost:8080/uc</code></p> </div> <p><code>localhost</code> represents the machine name where you installed the server.</p>

<p>Step 3</p>	<p>Log in with user ops.admin and no password. A Change Password dialog displays.</p> <div data-bbox="440 293 1461 745" style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p>Username: ops.admin</p> <p>Current Password: <input type="text"/></p> <p>New Password: <input type="text"/></p> <p>Confirm New Password: <input type="text"/></p> <p style="text-align: center;"><input type="button" value="Change Password"/></p> <p style="text-align: center; color: red;">The system administrator requires you to change your password.</p> </div>																																																		
<p>Step 4</p>	<p>Enter a password in the New Password and Confirm New Password fields (the Current Password field should remain empty) and click Change Password. The Universal Controller Home Dashboard displays.</p>																																																		
<p>Step 5</p>	<p>The System Details Widgets provides current system information. Check the Release information to verify that the latest version number is displayed, as shown in the following example.</p> <div data-bbox="440 949 1546 1330" style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p style="text-align: center;">System Details ↻</p> <ul style="list-style-type: none"> ▼ Cluster Node { Active } ▲ Release { 7.4.0.0 build.78 } <ul style="list-style-type: none"> Release 7.4.0.0 Build build.78 Build Date 01-27-2023_1227 ▼ Memory { 158.66 MB (2.58%) / 6144.00 MB } ▼ License { *Stonebranch Internal* } ▼ Database { Microsoft SQL Server } </div>																																																		
<p>Step 6</p>	<p>From the Agents and Connections navigation pane, select Agents > All Agents or Agents > <type of Agent>. You will see a list similar to the following example. Make sure the Status of the Agent is Active.</p> <table border="1" data-bbox="440 1447 1546 1906" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Status</th> <th>Version</th> <th>Type</th> <th>Name</th> <th>Host Name</th> </tr> </thead> <tbody> <tr> <td> Active</td> <td>7.4.0.0</td> <td>Windows</td> <td>qa-w2k19-x64 - W2K19X64</td> <td>qa-w2k19-x64</td> </tr> <tr> <td> Active</td> <td>7.4.0.0</td> <td>Windows</td> <td>qa-w2k16-x64 - W2K16X64</td> <td>qa-w2k16-x64</td> </tr> <tr> <td> Active</td> <td>6.3.0.6</td> <td>Linux/Unix</td> <td>qa-solaris10 - SOL10</td> <td>qa-solaris10</td> </tr> <tr> <td> Active</td> <td>7.3.0.0</td> <td>z/OS</td> <td>QAZOS205 - QAZOS205-V730</td> <td>QAZOS205</td> </tr> <tr> <td> Active</td> <td>7.4.0.0</td> <td>Linux/Unix</td> <td>qa-opswise6 - QAOPSWISE6</td> <td>qa-opswise6</td> </tr> <tr> <td> Active</td> <td>6.7.0.0</td> <td>Linux/Unix</td> <td>qa-db2.stone.branch - QADB2</td> <td>qa-db2.stone.bra...</td> </tr> <tr> <td> Active</td> <td>6.6.0.0</td> <td>Windows</td> <td>qa-db8 - qa-db8</td> <td>qa-db8</td> </tr> <tr> <td> Active</td> <td>6.6.0.0</td> <td>Windows</td> <td>qa-db11 - qa-db11</td> <td>qa-db11</td> </tr> <tr> <td> Active</td> <td>7.4.0.0</td> <td>Linux/Unix</td> <td>qa-lx4u18-x64 - LX4U18X64</td> <td>qa-lx4u18-x64.sto...</td> </tr> </tbody> </table>	Status	Version	Type	Name	Host Name	Active	7.4.0.0	Windows	qa-w2k19-x64 - W2K19X64	qa-w2k19-x64	Active	7.4.0.0	Windows	qa-w2k16-x64 - W2K16X64	qa-w2k16-x64	Active	6.3.0.6	Linux/Unix	qa-solaris10 - SOL10	qa-solaris10	Active	7.3.0.0	z/OS	QAZOS205 - QAZOS205-V730	QAZOS205	Active	7.4.0.0	Linux/Unix	qa-opswise6 - QAOPSWISE6	qa-opswise6	Active	6.7.0.0	Linux/Unix	qa-db2.stone.branch - QADB2	qa-db2.stone.bra...	Active	6.6.0.0	Windows	qa-db8 - qa-db8	qa-db8	Active	6.6.0.0	Windows	qa-db11 - qa-db11	qa-db11	Active	7.4.0.0	Linux/Unix	qa-lx4u18-x64 - LX4U18X64	qa-lx4u18-x64.sto...
Status	Version	Type	Name	Host Name																																															
Active	7.4.0.0	Windows	qa-w2k19-x64 - W2K19X64	qa-w2k19-x64																																															
Active	7.4.0.0	Windows	qa-w2k16-x64 - W2K16X64	qa-w2k16-x64																																															
Active	6.3.0.6	Linux/Unix	qa-solaris10 - SOL10	qa-solaris10																																															
Active	7.3.0.0	z/OS	QAZOS205 - QAZOS205-V730	QAZOS205																																															
Active	7.4.0.0	Linux/Unix	qa-opswise6 - QAOPSWISE6	qa-opswise6																																															
Active	6.7.0.0	Linux/Unix	qa-db2.stone.branch - QADB2	qa-db2.stone.bra...																																															
Active	6.6.0.0	Windows	qa-db8 - qa-db8	qa-db8																																															
Active	6.6.0.0	Windows	qa-db11 - qa-db11	qa-db11																																															
Active	7.4.0.0	Linux/Unix	qa-lx4u18-x64 - LX4U18X64	qa-lx4u18-x64.sto...																																															

<p>Step 7</p>	<p>From the Agents and Connections navigation pane, select System > OMS Servers. You will see a list similar to the following example. Make sure the Status of the OMS Servers are Connected.</p> <table border="1" data-bbox="440 309 1544 779"> <thead> <tr> <th>OMS Server Address ^</th> <th>Description</th> <th>Status ^</th> </tr> </thead> <tbody> <tr> <td>qa-aix72:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-lx3rh7-x64:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-lx3s12-x64:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-lx4deb9-x64:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-lx4u18-x64:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-opswise6:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-sol11-x64</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-solaris11:7878</td> <td></td> <td>Connected</td> </tr> <tr> <td>qa-w2k16-x64:7878</td> <td></td> <td>Connected</td> </tr> </tbody> </table>	OMS Server Address ^	Description	Status ^	qa-aix72:7878		Connected	qa-lx3rh7-x64:7878		Connected	qa-lx3s12-x64:7878		Connected	qa-lx4deb9-x64:7878		Connected	qa-lx4u18-x64:7878		Connected	qa-opswise6:7878		Connected	qa-sol11-x64		Connected	qa-solaris11:7878		Connected	qa-w2k16-x64:7878		Connected
OMS Server Address ^	Description	Status ^																													
qa-aix72:7878		Connected																													
qa-lx3rh7-x64:7878		Connected																													
qa-lx3s12-x64:7878		Connected																													
qa-lx4deb9-x64:7878		Connected																													
qa-lx4u18-x64:7878		Connected																													
qa-opswise6:7878		Connected																													
qa-sol11-x64		Connected																													
qa-solaris11:7878		Connected																													
qa-w2k16-x64:7878		Connected																													
<p>Step 8</p>	<p>For more information about these components in the Universal Controller user interface, see:</p> <ul style="list-style-type: none"> • Agents Overview • OMS Servers 																														

6.4.8 Apply the License Key

Although you do not normally need to enter a license key immediately after installation, at some point you will need to follow these steps to enter your key:

<p>Step 1</p>	<p>From the Services, select Properties. The Properties list displays.</p>
<p>Step 2</p>	<p>Click the License Key property Value field and enter your encrypted license key.</p>
<p>Step 3</p>	<p>Return to the System Details Widgets and review the License field to verify that the terms of your license are correct.</p>
<p>Step 4</p>	<p>Optionally, configure the Controller so that your system administrator receives notifications regarding System Notifications for License Violations and Expirations</p>

6.4.8.1 License Information

The License field in the System Details widget (view the system-defined [Home Dashboard](#) or, on the [Reporting](#) navigation pane, click **Widgets**) identifies license information for:

- Expiry Date
- Distributed Agents
- z/OS Agents
- Tasks
- Monthly Executions
- Cluster Nodes
- UPPS
- USAP

- Customer
- Environment

6.4.9 Enable LDAP Synchronization

In order to log in to the Controller using [Credentials for Running Tasks Authentication](#), you must set the [LDAP Synchronization Enabled](#) Universal Controller System property (**Administration > Configuration > Properties** in the Controller user interface) to **true**.

6.4.10 Configure System Notifications

System Notifications are emails sent to one or more Universal Controller system administrators based on either:

- [System Notifications for License Violations and Expirations](#)
- Status of a [System Notification for System Operations](#)
- [System Notification for Data Backup / Purge Operations](#)

Note

System Notifications are not the same as Email Notifications. Please refer to the following sections for explicitly defining Email Notifications.

- [Sending Notifications on Status of an Agent](#)
- [Sending Notifications on Status of an OMS Server](#)
- [Sending Notifications on Status of a Cluster Node](#)
- [Email Notification Actions](#)

In order for a system administrator to receive system notifications, you must configure the Controller for system notifications:

<p>Step 1</p>	<p>Select an Email Connections on which the notifications will be sent and enable the Use for System Notifications field.</p> <div data-bbox="394 1485 1546 1693" style="border: 1px solid orange; padding: 5px;"> <p>Note</p> <p>Only one Email Connection can be used for system notifications. If this field is checked in an Email Connection Details, it will appear unchecked on all other Email Connection Details. If you then check this field in another Email Connection Details, it automatically will be unchecked from the Details in which it had been checked.</p> </div>
<p>Step 2</p>	<p>Identify the Universal Controller Administrator(s) that will receive the system notifications by entering one or more valid email addresses for those administrators in the Administrator Email Address Universal Controller system property.</p>
<p>Step 3</p>	<p>If you want to identify the source system that is sending the system notifications in the Subject line of the emails, enter a value in the System Identifier Universal Controller system property.</p>

6.4.10.1 System Notifications for License Violations and Expirations

When you have configured the Controller for system notification, notifications automatically are sent to the specified system administrator(s) for the following license issues:

- License violations
- Expired licenses
- Invalid licenses

6.4.10.1.1 License Violations

A system notification is sent for the following license violations:

- User attempts to create a task that exceeds the licensed maximum number of task definitions.
- User attempts to enable a trigger that exceeds the licensed maximum number of enabled triggers.
- Agent registration attempt exceeds the licensed maximum number of Agents.

The License field in the System Details widget (view the system-defined [Home Dashboard](#) or, on the [Reporting](#) navigation pane, click **Widgets**) identifies these maximum numbers (see [License Information](#))

6.4.10.1.2 License Expiration

A system notification is sent at the following times if a license will expire in 7 days or sooner:

- Warning sent daily at midnight, processed same time as midnight log rollover, starting 7 days prior to license expiration.
- Warning sent on Controller start-up (or a cluster node becoming the Active cluster node) if license is within 7 days of expiring.
- Warning sent on License Key property change (if new license is still within 7 days of expiring).

A system notification is sent at the following times if a license has expired:

- Sent daily at midnight, processed same time as midnight log rollover.
- Sent on Controller start-up (or a cluster node becoming the Active cluster node).
- Sent on License Key property change (if new license still expired).
- System paused on license expiration.

Note

A [License Expiration](#) message also displays on the [Console](#) when you log in to the Controller if the license will expire within the week and when the license already has expired.

6.4.10.1.3 Invalid Licenses

A system notification is sent at the following times if a license is invalid:

- Sent on Controller start-up (or a cluster node becoming the Active cluster node).
- System paused on invalid license.

6.4.10.2 System Notification for System Operations

For any Controller task, you can select a system operation to be performed when any instance of that task reaches one or more specific statuses. You also can select whether or not to send system notifications based on the success and/or failure of that system operation.

For detailed information on how to set up these system notifications, see [System Operation Actions](#).

6.4.10.3 System Notification for Data Backup / Purge Operations

For any scheduled Data Backup / Purge operation, you can select to receive system notifications.

For detailed information on how to set up system notifications for Data Backup / Purge operations, see [Data Backup - Purge](#).

6.5 Adding a Cluster Node

6.5.1 Overview

When you install Universal Controller, you create a single instance (cluster node) of the Controller. To operate Universal Automation Center in a [High Availability](#) (HA) environment, you must add one or more cluster nodes. Each cluster node should be installed on a separate machine.

This page tells you how to add one or more cluster nodes.

6.5.1.1 Requirements for Adding a Cluster Node

Each cluster node in an HA environment must connect to the same Universal Controller database. If one of the cluster nodes stops processing, another cluster node continues processing with the same data.

Each cluster node in an HA environment must be the same version and build of the Controller. To ensure this, you can either:

- Install the downloaded version of the Controller on a second machine.
- Download a new version of the Controller software, update the current version, and then install the new version on a second machine.

It is strongly recommended that an HA environment has at least two OMS Servers, although you do not need an OMS Server for every cluster node if your HA environment contains three or more cluster nodes.

6.5.1.2 Procedure for Adding a Cluster Node

This page describes the following procedure:

1	Copy and Unpack the Downloaded Distribution File
2	Install the Controller
3	Deploy the Controller
4	Verify the Installation

5	Adding an OMS Server
----------	--------------------------------------

This procedure assumes you already have performed any required [Pre-Installation Procedure](#) steps for the cluster node being added.

6.5.2 Copy and Unpack the Universal Controller Distribution File

Copy the downloaded distribution file, which was used to install the current, single instance of Universal Controller, from its current location to the machine on which you want to install a new instance of the Controller.

To unpack the Universal Controller distribution file, use the following method appropriate for your platform:

Linux/Unix	<pre>tar xvf uc-controller-N.N.N.N.tar</pre>
Windows	Use an appropriate archiving / unzipping product.

6.5.3 Install the Controller

To install the Controller, issue the following command that is appropriate for your platform:

Linux	<pre>> sh install-controller.sh</pre>
Windows	<pre>> install-controller.bat</pre>

You must include command line switches that specify information the Controller needs to access the Tomcat installation directory, the war file, and the database. You can include additional command line switches, but they are not required.

If a required command line switch is missing from the command line, an error message will identify it during the installation process.

The Controller installation process writes the values for some command line switches to the [Universal Controller Start-up Properties \(uc.properties\)](#), `uc.properties` (see the table, below). For any of those command line switches that are not required and, in fact, are not included on the command line, the Controller installation process writes their default value to `uc.properties`.

6.5.3.1 Command Line Switches

The following table describes the command line switches for the Controller installation process and identifies which are required.

For command line switches that have their value written to the [Universal Controller Start-up Properties \(uc.properties\)](#), `uc .p`
`roperties`, the table also identifies the property in that file to which the value is written.

Note

All command line switches are case-sensitive.

Command Line Switch	Description	Default	Required	Controller Property
<pre>-- controller- file</pre>	Full path of the Universal Controller war file from the downloaded Universal Controller package.	none	Yes	

Command Line Switch	Description	Default	Required	Controller Property
<div style="border: 1px solid black; padding: 5px; width: fit-content;">--dbname</div>	<p>Universal Controller database name.</p> <div style="border: 2px solid orange; padding: 10px; margin-top: 10px;"> <p>The property <code>uc.db.name</code> should be set to the name of the database being connected to. It can be seen in the System Details widget under Database information as well as in the <code>uc.log</code>.</p> <ul style="list-style-type: none"> • Oracle <ul style="list-style-type: none"> • For Oracle, the <code>uc.db.name</code> property is for informational purposes only. • SQL Server <ul style="list-style-type: none"> • If the <code>uc.db.url</code> property contains the attribute "DatabaseName" then the <code>uc.db.name</code> property is for informational purposes only, similar to Oracle. • If however, the <code>uc.db.url</code> does not contain the database name, then the <code>uc.db.name</code> will be used to connect to the database by issuing the SQL "USE dbname", where dbname is the value of the <code>uc.db.name</code> property. • MySQL <ul style="list-style-type: none"> • MySQL should not contain the database name in the <code>uc.db.url</code> property. • MySQL will use the <code>uc.db.name</code> property to connect to the database specified by also issuing the SQL "USE dbname" statement where dbname is the value of the <code>uc.db.name</code> property. </div>	uc	No	uc.db.name=
<div style="border: 1px solid black; padding: 5px; width: fit-content;">--dbpass</div>	Database user's password.	none	Yes	uc.db.password=

Command Line Switch	Description	Default	Required	Controller Property								
<code>--dburl</code>	<p>JDBC connection URL.</p> <p>Format: <code>jdbc:<jdbc vendor>:<other jdbc vendor data></code></p> <p>Examples (for MS SQLServer, <code>uc</code> is the database name; for Oracle, <code>XE</code> is the SID):</p> <table border="1"> <tr> <td>MySQL</td> <td><code>jdbc:mysql://localhost:3306/</code></td> </tr> <tr> <td>MS SQL Server</td> <td><code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code></td> </tr> <tr> <td>MS SQL Server JTDS</td> <td><code>jdbc:jtds:sqlserver://localhost:1433/uc</code></td> </tr> <tr> <td>Oracle</td> <td><code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code></td> </tr> </table>	MySQL	<code>jdbc:mysql://localhost:3306/</code>	MS SQL Server	<code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code>	MS SQL Server JTDS	<code>jdbc:jtds:sqlserver://localhost:1433/uc</code>	Oracle	<code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code>	<code>jdbc:mysql://localhost</code>	No	<code>uc.db.url=</code>
MySQL	<code>jdbc:mysql://localhost:3306/</code>											
MS SQL Server	<code>jdbc:sqlserver://localhost:1433;DatabaseName=uc</code>											
MS SQL Server JTDS	<code>jdbc:jtds:sqlserver://localhost:1433/uc</code>											
Oracle	<code>jdbc:oracle:thin:@//localhost:1521/ServiceName</code> or <code>jdbc:oracle:thin:@localhost:1521:XE</code>											
<code>--dbuser</code>	Database user name.	none	Yes	<code>uc.db.user=</code>								
<code>--port</code>	<p>Used by the Universal Controller to generate a unique Cluster Node Node Id in the format of hostname:port-dbname.</p> <div style="border: 2px solid orange; padding: 5px;"> <p>Note</p> <p>This is meant to represent the value of the Tomcat HTTP/1.1 Connector port configured in the server.xml.</p> <p>It is used solely for Node Id generation and does not impact the Tomcat HTTP/1.1 Connector configuration.</p> </div>	8080	No	<code>uc.servlet.port</code>								

Command Line Switch	Description	Default	Required	Controller Property
<code>--rdbms</code>	<p>Database type.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> mysql sqlserver oracle <p>* --rdbms is required if --dburl is used in the command.</p>	mysql	No *	uc.db.rdbms=
<code>--tomcat-dir</code>	<p>Path to the Tomcat installation directory (contains the directories: /bin, /conf, /logs, webapps).</p>	none	Yes	

6.5.3.2 Examples

Shown below are sample commands for installing the Controller on Linux and Windows platforms, using defaults for the database:

Linux	<pre>sh install-controller.sh --tomcat-dir ~/tomcat --controller-file ./uc-controller-N.N.N.N-build.N.war --dbuser root --dbpass userpass</pre>
Windows	<pre>install-controller.bat --tomcat-dir "c:\Program Files\Apache Software Foundation\Tomcat 8.5" --controller-file uc-controller-N.N.N.N-build.N.war --dbuser root --dbpass userpass</pre> <p>Note</p> <p>In the Tomcat directory (--tomcat-dir), when quoting the directory is necessary due to spaces, do not use a single backslash before the ending quotation mark; use either a double backslash or no backslash to avoid the command shell from treating \" as an escape character.</p>

6.5.4 Deploy the Controller

In this procedure, you will start Tomcat, which starts the Controller and builds your database tables. This process takes several minutes. When it is complete, the Controller is started and ready to use.

If Tomcat already was running when you installed the Controller, you do not need to stop and restart it; this process will occur automatically after you start the installation.

<p>Step 1</p>	<p>Start Tomcat as follows:</p> <p>Linux Start the Tomcat daemon using the script placed in the <code>/etc/init.d</code> directory for Tomcat.</p> <pre>service [name of Tomcat service] start</pre> <p>Windows We recommend you use Windows Services to start Tomcat. Or, you can start Tomcat from the command line as follows:</p> <pre>net start [name of Tomcat service]</pre> <p>Linux or Windows You can start the service using the <code>\$CATALINA_HOME/bin/startup.bat</code> or <code>\$CATALINA_HOME/bin/startup.sh</code> scripts.</p>
<p>Step 2</p>	<p>You can view details of the start-up in the Tomcat window or monitor the Controller log, as described below:</p> <p>Linux/Unix Users can tail the <code>uc.log</code> to monitor the deployment process, as follows:</p> <pre>tail -f \$TOMCAT_DIR/uc_logs/uc.log</pre> <p>Windows Users can use a third-party tailing utility or open the log file using Notepad or other editor and scroll to the bottom to view the latest activity.</p> <pre>\$TOMCAT_DIR/uc_logs/uc.log</pre>
<p>Step 3</p>	<p>When you see the following, the Controller is ready:</p> <ul style="list-style-type: none"> • INFO [Ops.Cluster.Monitor.0] Server is now Running in Passive mode. • INFO [Ops.Cluster.Monitor.0] Setting server to PASSIVE.

Step 4	<p>AIX and z/Linux only: Follow this procedure to change two default values in the Universal Controller Start-up Properties (uc.properties), <code>uc.properties</code>, which is read by the Controller.</p> <p>(The <code>uc.properties</code> file resides in <code><tomcat directory>/webapps/uc/WEB-INF/properties</code>).</p> <ol style="list-style-type: none"> Change the following two properties from their default value to the AIX - z/Linux value: <ul style="list-style-type: none"> <code>uc.trustmanager.algorithm=</code> (Java trust manager algorithm) <ul style="list-style-type: none"> Default value = SunX509 AIX - z/Linux value = IbmX509 <code>uc.trustmanager.provider=</code> (Java trust manager provider) <ul style="list-style-type: none"> Default value = SunJSSE AIX - z/Linux value = IBMJSSE2 Restart Tomcat.
---------------	--

You now have completed the install process and the Controller is running.

6.5.5 Verify the Installation

To make sure the new cluster node is installed and running properly:

Step 1	Log in to the originally installed Controller.
Step 2	Verify that the Cluster Node Status Widgets illustrates an Active and a Passive cluster node.
Step 3	For detailed information on the new (and original) cluster nodes, select Resources > System > Cluster Nodes .

Note

The [Apply the License Key](#) for the installed Universal Controller applies to all instances (cluster nodes) of that Controller; no additional licensing is required.

[Configure System Notifications](#) configured for the installed Universal Controller apply to all instances (cluster nodes) of that Controller; no additional system notifications have to be configured.

6.5.6 Adding an OMS Server

To add a second OMS Server to an HA environment (which creates an OMS cluster), you must install Universal Agent on a machine where one of the additional cluster nodes has been added.

6.5.6.1 Add OMS Server to OMS Server Record

You must specify all members of an OMS cluster in your HA environment in the same [Creating OMS Server Records](#).

The OMS Servers list screen will contain a single entry for all OMS cluster members defined in the record. (The OMS Servers list screen could have additional entries for an OMS Server or OMS cluster outside of your HA environment. For example, OMS Servers outside a firewall would connect to a different message database and serve different Agents, but would connect to to the same Controller.)

6.5.6.2 OMS Server Message Database

Members of an OMS cluster in an HA environment must use the same [OMS Server Message Database](#).

The OMS [SPOOL_DIRECTORY - OMS configuration option](#) configuration option specifies the name of the directory where the OMS maintains its message database. For each OMS Server, you must set this option to a location shared by all of the OMS Servers in the HA environment.

6.6 Applying Maintenance to Universal Controller

6.6.1 Overview

For Universal Controller 7.5.x, applying maintenance refers to the increase from a currently installed 6.1.x or later [release](#) of the Controller to a 7.5.x release of the Controller (for example, increase Controller 6.2.0.1 to Controller 7.5.0.0).

Java 8 support is dropped starting in Universal Controller 7.5.x. See [Universal Controller 7.5.x Prerequisites](#) for supported versions.

6.6.2 Universal Controller Maintenance

As a precautionary measure, it is highly recommended that you back up the Universal Controller database prior to applying maintenance.

Note

These instructions assume that you are running a [High Availability](#) Universal Controller system: a system configured with **Active** and **Passive** Controllers (cluster nodes). If you are running a single Controller, disregard the steps for the **Passive** Controllers.

To apply maintenance to the currently installed release of Universal Controller:

<p>Step 1</p>	<p>From the Stonebranch Customer Portal, download the Universal Controller 7.5.x package (for instructions, see Downloading Universal Controller Software).</p>
<p>Step 2</p>	<p>If any JDBC drivers have been added to the Controller installation, these should be backed up prior to the application of maintenance and then copied back after the application. Instructions for adding drivers can be found here.</p>
<p>Step 3</p>	<p>Unpack the Universal Controller distribution file, using the following method appropriate for your platform:</p> <p>Windows Use an appropriate archiving / unzipping product.</p> <p>Linux/Unix</p> <pre>tar -xvf universal-controller-N.N.N.N.tar</pre>
<p>Step 4</p>	<p>Stop the Tomcat container in which the Passive cluster node is deployed.</p> <p>Windows Use the services application to stop Tomcat. You also can issue the stop command on a command line:</p> <pre>net stop [name of Tomcat service]</pre> <p>UNIX Stop the daemon using the script found in the <code>/etc/init.d</code> directory for Tomcat.</p> <pre>service [name of Tomcat service] stop</pre> <p>Windows or UNIX Stop the service using the <code>\$CATALINA_HOME/bin/shutdown.bat</code> or <code>\$CATALINA_HOME/bin/shutdown.sh</code> scripts:</p> <ul style="list-style-type: none"> • Windows <pre>cd \$CATALINA_HOME\bin shutdown</pre> <ul style="list-style-type: none"> • Linux/Unix <pre>cd \$CATALINA_HOME/bin ./shutdown</pre>
<p>Step 5</p>	<p>Stop the Tomcat container in which the Active cluster node is deployed, using one of the methods shown in Step 4.</p>

Step 6	<p>For the Active cluster node deployment:</p> <ol style="list-style-type: none"> 1. Delete the existing deployment directory and war file from your webapps directory. <p>The Controller installation process renamed the unpacked war file (<code>universal-controller-N.N.N.N-build.N.war</code>) as <code>uc.war</code> , so the following would be your deployment directory and war file:</p> <pre>[tomcat-install]\webapps\uc [tomcat-install]\webapps\uc.war</pre> <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>If you want to rename the deployment directory and uc.war for back-up, you must do so outside of the Tomcat folder.</p> </div> <ol style="list-style-type: none"> 2. Copy the war file from the new downloaded package to your webapps directory and rename the war file <code>uc.war</code> . 3. Start the Tomcat container in which the Active cluster node is deployed. <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>We recommend that all Universal Controller users clear their browser cache and close their browser prior to re-opening and navigating back to the Universal Controller URL to ensure that the most recent client updates are loaded.</p> </div> <ol style="list-style-type: none"> 4. Log in to the Active cluster node deployment with user ops.admin or a user with equivalent authorization and verify the installation (see Verify the Installation, below). <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>If you have deployed any JDBC driver jar files (or in the case of DB2, a JDBC driver license jar file) to the <code>\$CATALINA_HOME/webapps/uc/WEB-INF/lib</code> directory, you must recopy these files to this directory and restart Tomcat after your initial validation.</p> </div>
Step 7	<p>Repeat Step 6 for the Passive cluster node deployment.</p>

6.6.3 Verify the Installation

To make sure the Controller is installed, running, and communication with Universal Agent and Universal Message Service (OMS), verify the installation after you have logged on:

Step 1

From the [Home dashboard](#), verify that the System Details widget displays the appropriate Universal Controller release.

The screenshot shows the 'System Details' widget with the following information:

- Cluster Node** { Active }
 - Node Id: qa-opswise6:8080-qa_opswise6
 - Node Mode: Active
 - Node Uptime: 20 Days 23 Hours 18 Minutes 8 Seconds
 - Node Time: 2023-07-18 14:35:42 -0400 (US/Eastern)
 - Release** { 7.5.0.0 build.90 }
 - Release: 7.5.0.0
 - Build: build.90
 - Build Date: 06-27-2023_1246
 - Memory** { 125.08 MB (2.04%) / 6144.00 MB }
 - Memory Maximum: 6144.00 MB
 - Memory Used: 125.08 MB (2.04%)
 - Memory Free: 6018.92 MB (97.96%)
 - License** { *Stonebranch Internal* }
 - Database** { Microsoft SQL Server }

Step 2

From the **Agents** navigation pane, select **Agents > All Agents** or **Agents > <type of Agent>**. You will see a list similar to the following example. Make sure the **Status** of the Agent is **Active**.

The screenshot shows the 'Agents' navigation pane with a table of agents. The table has columns for Status, Version, Type, Name, and Host Name. The agents listed are:

Status	Version	Type	Name	Host Name
Active	7.5.0.0	Linux/Unix	qa-lx3rh7-x64.stone.branch - AGNT-QA-LX3...	qa-lx3rh7-x64.sto...
Active	6.6.0.0	Windows	qa-db8 - qa-db8	qa-db8
Active	7.3.0.1	z/OS	QAZOS205 - QAZOS205-V730	QAZOS205
Active	7.5.0.0	Linux/Unix	qa-lx4u18-x64 - LX4U18X64	qa-lx4u18-x64.sto...
Active	6.4.3.0	Linux/Unix	sparse10 - SPARSE10	sparse10
Active	7.5.0.0	z/OS	QAZOS205 - QAZOS205-V741	QAZOS205
Active	7.5.0.0	Linux/Unix	qa-lx4s12-p64le - AGNT-QA-LX4S12-P64LE-1...	qa-lx4s12-p64le
Active	7.5.0.0	Linux/Unix	qa-opswise6 - QAOPSWISE6	qa-opswise6
Active	7.2.0.3	z/OS	QAZOS205 - QAZOS205-V720	QAZOS205
Active	6.3.0.0	Linux/Unix	qa-sol9 - SOL9	qa-sol9
Active	7.5.0.0	Linux/Unix	qa-sol11-x64 - AGNT-QA-SOL11-X64	qa-sol11-x64
Active	6.9.0.0	Linux/Unix	qasol10z - SOL10Z	qa-sol10z-t5220
Active	7.5.0.0	Linux/Unix	qa-lx4rh8-s390x - LX4RH8S39	qa-lx4rh8-s390x
Active	5.2.0.11	Linux/Unix	qa-solaris8 - SOL8	unknown
Active	7.0.0.0	Linux/Unix	qa-sage.stone.branch - SAGE.STONE.BRANC...	qa-sage.stone.bra...
Active	6.9.0.0	Linux/Unix	hp01.opslab - HP01	hp01.opslab
Offline	7.4.0.0	Linux/Unix	qa-lx4u18-x64.stone.branch - QA-LX4U18-X...	qa-lx4u18-x64.sto...
Offline	7.4.0.0	Linux/Unix	qa-lx3s12-x64 - AGNT-QA-LX3S12-X64-1AS	qa-lx3s12-x64

Step 3

From the **System** navigation pane, select **System > OMS Servers**. You will see a list similar to the following example. Make sure the **Status** of the OMS Servers are **Connected**.

OMS Server Address	Description	Status	Session Status	Suspended
qa-lx3rh7-x64:7878		Connected	Operational	No
qa-lx4s12-p64le:7878		Connected	Operational	No
qa-lx4u18-x64:7878		Connected	Operational	No
qa-opswise6:7878		Connected	Operational	No
qa-sol11-x64:7878		Connected	Operational	No

Step 4

For more information about these components in the Universal Controller user interface, see:

- [Agents Overview](#)
- [OMS Servers](#)

7 Starting and Stopping Universal Controller

This page provide platform-specific instructions for starting and stopping Universal Controller 7.5.x.

7.1 Starting and Stopping the Controller on UNIX

Note

These procedures are appropriate for all [supported systems](#) of UNIX.

<p>Linux</p>	<p>To start or stop the Controller (all versions), issue the following commands:</p> <pre>\$CATALINA_HOME/bin/startup.sh \$CATALINA_HOME/bin/shutdown.sh</pre> <p>or</p> <pre>service tomcat start service tomcat stop</pre> <p>If you have configured your system with init.d, you also can use the following commands:</p> <pre>/etc/init.d/tomcat start /etc/init.d/tomcat stop</pre>
<p>AIX</p>	<p>The procedures for starting and stopping the Controller are dependent on how Tomcat was configured when the Controller installed.</p>

7.2 Starting and Stopping the Controller on Windows

To start or stop the Controller (all versions) from the DOS prompt, use the following commands:

```
net stop $Tomcat_Service_Name
net start $Tomcat_Service_Name
```

Note

`$Tomcat_Service_Name` may vary based on the version of Tomcat installed on your machine.